


C110RBN4-F

Total volume - Capacité totale - Capacidad total	3.8 Cu. Ft.
Net Weight - Poids net - Peso neto	78 lbs.
Power supply Alimentation Alimentación	12/24 Vdc 100-240 Vac 50/60 Hz
Nominal consumption Consommation nominale Consumo nominal	12 Vdc 115 Vac 60 Hz 52 W (4.34 A) 52 W (0.64 A)


Mounting flange
Cadre de fixation
Perfil de fijación

t: 1
w: 23 1/8
h: 31 5/8

Flush Flange




Surface Flange



Built-in Compartiment encastrement Alojamiento empotrado	a: 22 1/16 b: 21 1/4 c: 30 1/4	a: 20 3/8 b: 21 1/4 c: 30 1/4
--	--------------------------------------	-------------------------------------

Dimensions and specifications subject to change

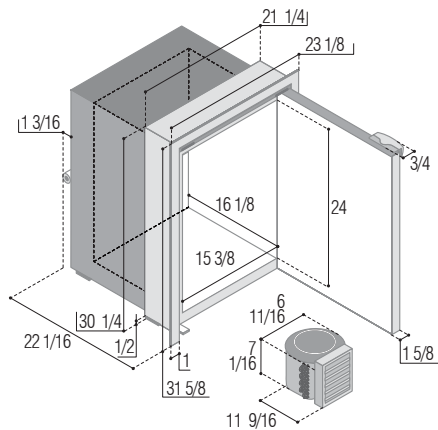

VITRIFRIGO




C55RBN4-F

Total volume - Capacité totale - Capacidad total	1.8 Cu. Ft.
Net Weight - Poids net - Peso neto	60 lbs.
Power supply Alimentation Alimentación	12/24 Vdc 100-240 Vac 50/60 Hz
Nominal consumption Consommation nominale Consumo nominal	12 Vdc 115 Vac 60 Hz 38 W (3.18 A) 38 W (0.51 A)


Mounting flange
Cadre de fixation
Perfil de fijación

t: 1
w: 21
h: 25 15/16

Flush Flange




Surface Flange



Built-in Compartiment encastrement Alojamiento empotrado	a: 17 7/8 b: 19 1/8 c: 24 1/2	a: 16 1/4 b: 19 1/8 c: 24 1/2
--	-------------------------------------	-------------------------------------

Dimensions and specifications subject to change

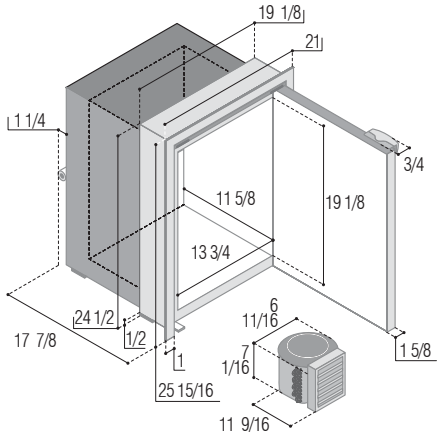

Coastal Climate Control, Inc.

www.CoastalClimateControl.com - info@CoastalClimateControl.com

301-352-5738 - Annapolis MD USA

VITRIFRIGO




Total volume - Capacité totale - Capacidad total	1.2 Cu. Ft.
Net Weight - Poids net - Peso neto	41.9 lbs.
Power supply Alimentation Alimentación	12/24 Vdc 100-240 Vac 50/60 Hz
Nominal consumption Consommation nominale Consumo nominal	12 Vdc 115 Vac 60 Hz 38 W (3.18 A) 38 W (0.51 A)


Mounting flange
Cadre de fixation
Perfil de fijación

t: 1
w: 17 13/16
h: 23

Flush Flange




Surface Flange



Built-in Compartment encastrément Alojamiento empotrado	a: 15 9/16 b: 15 15/16 c: 21 9/16	a: 13 7/8 b: 15 15/16 c: 21 9/16
---	---	--

Dimensions and specifications subject to change

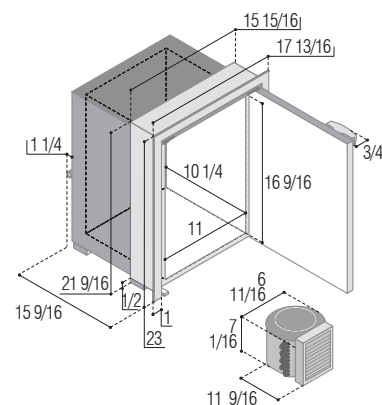


C30RBN4-F

Total volume - Capacité totale - Capacidad total	1.0 Cu. Ft.
Net Weight - Poids net - Peso neto	48.5 lbs.
Power supply Alimentation Alimentación	12/24 Vdc 100-240 Vac 50/60 Hz
Nominal consumption Consommation nominale Consumo nominal	12 Vdc 115 Vac 60 Hz 38 W (3.18 A) 38 W (0.51 A)


Mounting flange
Cadre de fixation
Perfil de fijación

t: 1
w: 23 1/8
h: 14 15/16

Flush Flange




Surface Flange



Built-in Compartment encastrément Alojamiento empotrado	a: 21 15/16 b: 21 1/4 c: 13 1/2	a: 20 1/4 b: 21 1/4 c: 13 1/2
---	---------------------------------------	-------------------------------------

Dimensions and specifications subject to change

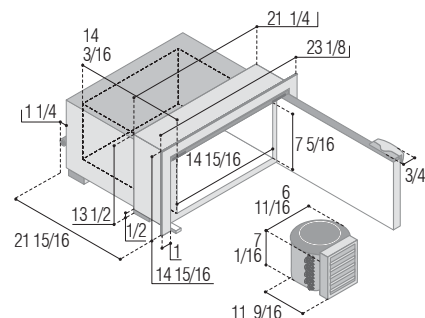

Coastal Climate Control, Inc.

www.CoastalClimateControl.com - info@CoastalClimateControl.com
301-352-5738 - Annapolis MD USA