




Also available in Stainless Steel

Mounting flange
Cadre de fixation
Perfil de fijación

t: 1
w: 17 7/16
h: 22 3/8


Built-in
Compartiment encastré
Alojamiento empotrado

Flush Flange



a: 20 7/16
b: 15 9/16
c: 21

Surface Flange



a: 18 3/4
b: 15 9/16
c: 21

Total volume
Capacité totale - Capacidad totale 1.8 Cu. Ft.

Freezer compartment
Compartiment freezer - Congelador 0.1 Cu. Ft.

Net weight
Poids net - Peso neto 39.7 Lbs.

Power supply and nominal consumption


Alimentation et consommation nominale - Alimentación y consumo nominal

12/24 Vdc 100-240 Vac 50/60 Hz

12 Vdc 115 Vac 60 Hz

40 W (3.38 A) 40 W (0.53 A)

Dimensions and specifications subject to change

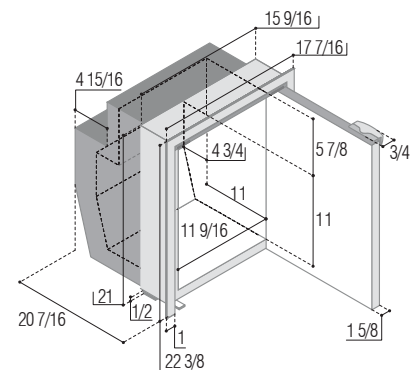

C39IBD4-F




Mounting flange
Cadre de fixation
Perfil de fijación

t: 1
w: 17 13/16
h: 23


Built-in
Compartiment encastré
Alojamiento empotrado

Flush Flange



a: 15 1/2
b: 15 15/16
c: 21 9/16

Surface Flange



a: 13 3/4
b: 15 15/16
c: 21 9/16

Total volume
Capacité totale - Capacidad totale 1.3 Cu. Ft.

Freezer compartment
Compartiment freezer - Congelador 0.1 Cu. Ft.

Net weight
Poids net - Peso neto 40.8 Lbs.

Power supply and nominal consumption


Alimentation et consommation nominale - Alimentación y consumo nominal

12/24 Vdc 100-240 Vac 50/60 Hz

12 Vdc 115 Vac 60 Hz

31 W (2.58 A) 31 W (0.44 A)

Dimensions and specifications subject to change

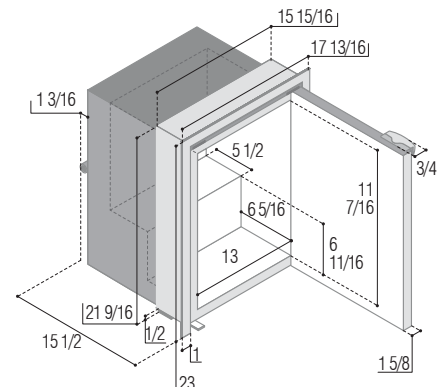

C62IBD4-F VITRIFRIGO

Refrigerators and freezers with built-in cooling unit


Total volume
Capacité total - Capacidad totale 2.2 Cu. Ft.

Freezer compartment
Compartment freezer - Congelador 0.2 Cu. Ft.

Net weight
Poids net - Peso neto 42.3 Lbs.

Power supply and nominal consumption
Alimentation et consommation nominale - Alimentación y consumo nominal
12/24 Vdc 100-240 Vac 50/60 Hz
12 Vdc 115 Vac 60 Hz
40 W (3.38 A) 40 W (0.53 A)

Dimensions and specifications subject to change

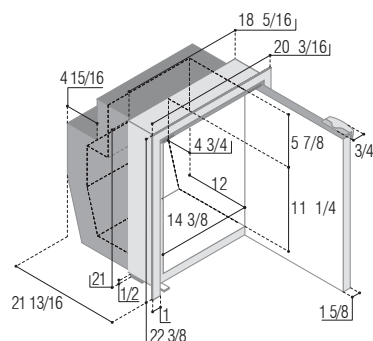


Also available in Stainless Steel


Mounting flange
Cadre de fixation
Perfil de fijación

t: 1
w: 20 3/16
h: 22 3/8

Flush Flange



Surface Flange



Built-in
Compartment encastrement
Alojamiento empotrado

a: 21 13/16
b: 18 5/16
c: 21

a: 20 3/16
b: 18 5/16
c: 21

C60IBD4-F


Total volume
Capacité total - Capacidad totale 2.1 Cu. Ft.

Freezer compartment
Compartment freezer - Congelador 0.4 Cu. Ft.

Net weight
Poids net - Peso neto 46.7 Lbs.

Power supply and nominal consumption
Alimentation et consommation nominale - Alimentación y consumo nominal
12/24 Vdc 100-240 Vac 50/60 Hz
12 Vdc 115 Vac 60 Hz
40 W (3.38 A) 40 W (0.53 A)

Dimensions and specifications subject to change

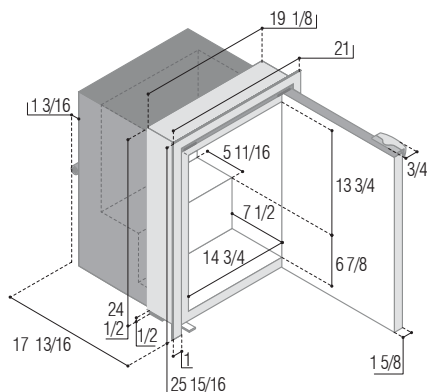


Also available in Stainless Steel


Mounting flange
Cadre de fixation
Perfil de fijación

t: 1
w: 21
h: 25 15/16

Flush Flange



Surface Flange



Built-in
Compartment encastrement
Alojamiento empotrado

a: 17 13/16
b: 19 1/8
c: 24 1/2

a: 16 1/8
b: 19 1/8
c: 24 1/2



Coastal Climate Control, Inc.

www.CoastalClimateControl.com - info@CoastalClimateControl.com
301-352-5738 - Annapolis MD USA