

DW100

Stainless steel drawer refrigerators and freezers

Power supply

Alimentation
Alimentación

12/24 Vdc

100-240 Vac 50/60 Hz

DW100RXP4-EF

Power supply and nominal consumption

Alimentation et consommation nominale

Alimentación y consumo nominal

12 Vdc 115 Vac 60 Hz

40 W (3.38 A) 40 W (0.53 A)

Net Weight

Poids net

Peso neto

Lbs.

68.3

DW100RXN4-EF


12 Vdc 115 Vac 60 Hz

52 W (4.34 A) 51 W (0.64 A)

Lbs.

68.3

Flush Flange



Built-in
Compartment encastrément
Alojamiento empotrado

Mounting flange
Cadre de fixation
Perfil de fijación

a: 25 7/16

b: 21 1/16

c: 20 7/8


t: 1

w: 22 15/16

h: 21 5/16



Surface Flange



a: 23 7/8

b: 20 13/16

c: 20 7/8

t: 11/16

w: 22 1/8

h: 21



Surface Flange versions

Surface flange versions

Surface flange versiones

DW100RXP4-ES

DW100RXN4-ES

Dimensions and specifications subject to change

Available as
Disponible comme
Disponible cómo

1 Refrigerator
Réfrigérateur
Frigorífico

2 Freezer
Congélateur
Congelador

Cu. Ft.

3.3

1

DW100
RXP4-EF


2

DW100
RXN4-EF

VITRIFRIGO



H max
14 15/16 in.

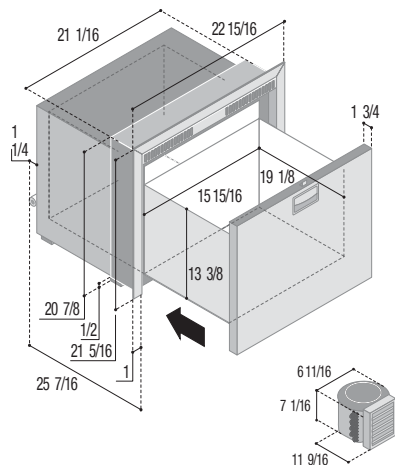

Coastal Climate Control, Inc.

www.CoastalClimateControl.com - info@CoastalClimateControl.com

301-352-5738 - Annapolis MD USA

Available as
Disponible comme
Disponible como

1 Refrigerator
Réfrigérateur
Frigorífico

2 Freezer
Congélateur
Congelador

3 Freezer + icemaker
Congélateur + icemaker
Congelador + icemaker

Cu. Ft.

2.6

1

DW70
RXP4-EF

2

DW70
RXN4-EF

3

DW70
RXN1-EFI

VITRIFRIGO



H max
11 13/16 in.



Coastal Climate Control, Inc.

www.CoastalClimateControl.com - info@CoastalClimateControl.com
301-352-5738 - Annapolis MD USA

Power supply
Alimentation
Alimentación

12/24 Vdc
100-240 Vac 50/60 Hz

Power supply with IM
Alimentation avec IM
Alimentación con IM

115 Vac 60 Hz
220-240 Vac 50 Hz

DW70RXP4-EF

Power supply and nominal consumption
Alimentation et consommation nominale
Alimentación y consumo nominal

12 Vdc **115 Vac 60 Hz**
38 W (3.18 A) 51 W (0.51 A)

Net Weight
Poids net
Peso neto
Lbs.
70.5

DW70RXN4-EF

12 Vdc **115 Vac 60 Hz**
40 W (3.38 A) 40 W (0.53 A)

Lbs.
70.5


DW70RXN1-EFI

115 Vac 60 Hz
168 W (2.32 A)

Lbs.
81.6



Flush Flange



Built-in
Compartiment encastré
Alojamiento empotrado


a: 23 1/4
b: 24 5/16
c: 17 11/16

Mounting flange
Cadre de fixation
Perfil de fijación

t: 1
w: 26 1/4
h: 18 1/8



Surface Flange



a: 21 3/4
b: 24 5/16
c: 17 11/16


t: 11/16
w: 25 3/8
h: 17 13/16

DW70RXN1-EFI DW70RXN1-ESI

remote cooling unit
unité extérieure
unidad externa

Total depth
Profondeur totale
Profundidad total

Flush Flange **Surface Flange**
24 5/8 23 1/4



Surface Flange versions
Surface flange versions
Surface flange versiones

DW70RXP4-ES
DW70RXN4-ES

DW70RXN1-ESI

Dimensions and specifications subject to change

