

DW210

Stainless steel drawer refrigerators and freezers

Power supply Alimentation Alimentación	Power supply with IM Alimentation avec IM Alimentación con IM
12/24 Vdc	115 Vac 60 Hz
100-240 Vac 50/60 Hz	220-240 Vac 50 Hz

DW210IXP4-EF

Power supply and nominal consumption Alimentation et consommation nominale Alimentación y consumo nominal	Net Weight Poids net Peso neto
12 Vdc 45 W (3.78 A)	115 Vac 60 Hz 45 W (0.57 A)
	Lbs. 132.2

DW210IXN4-EF

12 Vdc 61 W (5.1 A)	115 Vac 60 Hz 61 W (0.72 A)
	Lbs. 132.2

DW210IXN1-EFI

115 Vac 60 Hz 168 W (2.32 A)	Lbs. 143.3
---------------------------------	---------------


DW210IXD4-EF

Lbs. 132.2

DW210IXD1-EFI

Lbs. 143.3

Dimensions and specifications subject to change

Flush Flange	Built-in Compartiment encastré Alojamiento empotrado	Mounting flange Cadre de fixation Perfil de fijación
	a: 24 13/16 b: 27 3/16 c: 34 5/16	t: 1 w: 29 1/2 h: 34 3/8

Surface Flange	a: 23 1/16 b: 27 3/16 c: 34 7/16	t: 11/16 w: 28 1/4 h: 34 7/16
----------------	--	-------------------------------------

Surface Flange versions

Surface flange versions
Surface flange versiones

DW210IXP4-ES DW210IXN4-ES DW210IXD4-ES	DW210IXN1-ESI DW210IXD1-ESI
--	--------------------------------

Available as
Disponible comme
Disponibile como

1 Refrigerator
Réfrigérateur
Frigorífico

2 Freezer
Congélateur
Congelador

3 Freezer + icemaker
Congélateur + icemaker
Congelador + icemaker

Cu. Ft.


2.7	1	2	2	3	3
3.6	1	2	1	2	1
DW210 IXP4-EF	DW210 IXN4-EF	DW210 IXD4-EF	DW210 IXN1-EFI	DW210 IXD1-EFI	

VITRIFRIGO



H max
9 7/16 in.

H max
15 3/4 in.

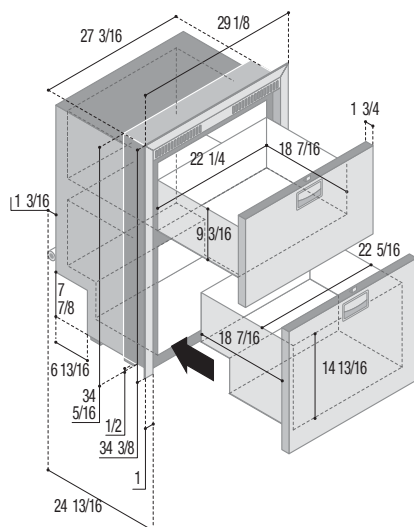

Coastal Climate Control, Inc.

www.CoastalClimateControl.com - info@CoastalClimateControl.com

301-352-5738 - Annapolis MD USA

Available as
Disponible como

1 Refrigerator
Réfrigérateur
Frigorífico

2 Freezer
Congélateur
Congelador

3 Freezer + icemaker
Congélateur + icemaker
Congelador + icemaker

Cu. Ft.

2.8	1	2	2	3	3
2.3	1	2	1	2	1

DW180
IXP4-EF

DW180
IXN4-EF

DW180
IXD4-EF

DW180
IXN1-EFI

DW180
IXD1-EFI

VITRIFRIGO



H max
12 13/16 in.



H max
12 13/16 in.

Power supply
Alimentation
Alimentación

12/24 Vdc
100-240 Vac 50/60 Hz

Power supply with IM
Alimentation avec IM
Alimentación con IM

115 Vac 60 Hz
220-240 Vac 50 Hz

DW180IXP4-EF

Power supply and nominal consumption
Alimentation et consommation nominale
Alimentación y consumo nominal

12 Vdc 115 Vac 60 Hz
45 W (3.78 A) 45 W (0.57 A)

Net Weight
Poids net
Peso neto

Lbs.
121.2

DW180IXN4-EF

12 Vdc 115 Vac 60 Hz
51 W (5.1 A) 51 W (0.72 A)

DW180IXD4-EF

Lbs.
121.2

DW180IXN1-EFI


115 Vac 60 Hz
168 W (2.32 A)

DW180IXD1-EFI

Lbs.
132.2

Dimensions and specifications subject to change

Flush Flange




Built-in
Compartiment encastrément
Alojamiento empotrado

a: 23 1/4
b: 24 5/16
c: 33 3/4

Mounting flange
Cadre de fixation
Perfil de fijación

t: 1
w: 26 1/4
h: 34 1/16

Surface Flange



a: 21 5/8
b: 24 5/16
c: 33 11/16


t: 11/16
w: 25 3/8
h: 33 13/16

Surface Flange versions

Surface flange versions
Surface flange versiones

DW180IXP4-ES
DW180IXN4-ES
DW180IXD4-ES

DW180IXN1-ESI
DW180IXD1-ESI

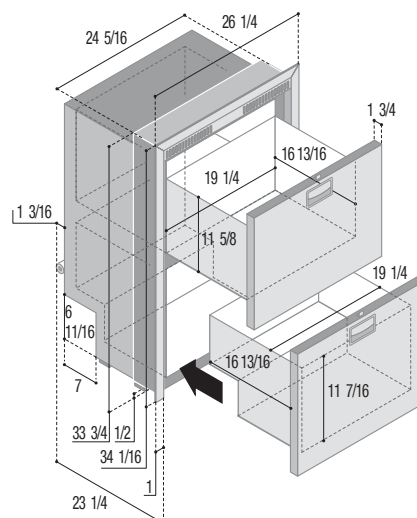

Coastal Climate Control, Inc.

www.CoastalClimateControl.com - info@CoastalClimateControl.com

301-352-5738 - Annapolis MD USA