

Available as
Disponible comme
Disponible como

1 Refrigerator
Réfrigérateur
Frigorífico

2 Freezer
Congélateur
Congelador

3 Freezer + icemaker
Congélateur + icemaker
Congelador + icemaker

Cu. Ft.

5.5	1	1	1	1	A
2.8	2	2	3	3	B
2.3	2	1	2	1	
	DW360 IXN4-EFV	DW360 IXD4-EFV	DW360 IXN1-EFIV	DW360 IXD1-EFIV	

VITRIFRIGO



H max
12 13/16 in.

H max
12 13/16 in.

Power supply
Alimentation
Alimentación

12/24 Vdc
100-240 Vac 50/60 Hz

Power supply with IM
Alimentation avec IM
Alimentación con IM

115 Vac 60 Hz
220-240 Vac 50 Hz

DW 360 IXN4-EFV

Power supply and nominal consumption
Alimentation et consommation nominale
Alimentación y consumo nominal

12 Vdc
A 45 W (3.78 A)
B 61 W (5.10 A)

DW 360 IXD4-EFV

Net Weight
Poids net
Peso neto

115 Vac 60 Hz
45 W (0.57 A)
61 W (0.72 A)
Lbs.
231.5

DW360IXN1-EFIV

Power supply and nominal consumption
Alimentation et consommation nominale
Alimentación y consumo nominal


12 Vdc
A 45 W (3.78 A)
B 168 W (2.32 A)

DW 360 IXD1-EFIV

Net Weight
Poids net
Peso neto

115 Vac 60 Hz
45 W (0.57 A)
168 W (2.32 A)
Lbs.
242.5

Flush Flange




Built-in
Compartiment encastré
Alojamiento empotrado

a: 23 1/4
b: 24 5/16
c: 66 11/16

Mounting flange
Cadre de fixation
Perfil de fijación

t: 1
w: 26 1/4
h: 67 3/16

Surface Flange



a: 21 5/8
b: 24 5/16
c: 66 15/16

t: 11/16
w: 25 3/8
h: 66 7/8


Surface Flange versions

Surface flange versions
Surface flange versiones

DW360IXN4-ESV
DW360IXD4-ESV

DW360IXN1-ESIV
DW360IXD1-ESIV

Dimensions and specifications subject to change.

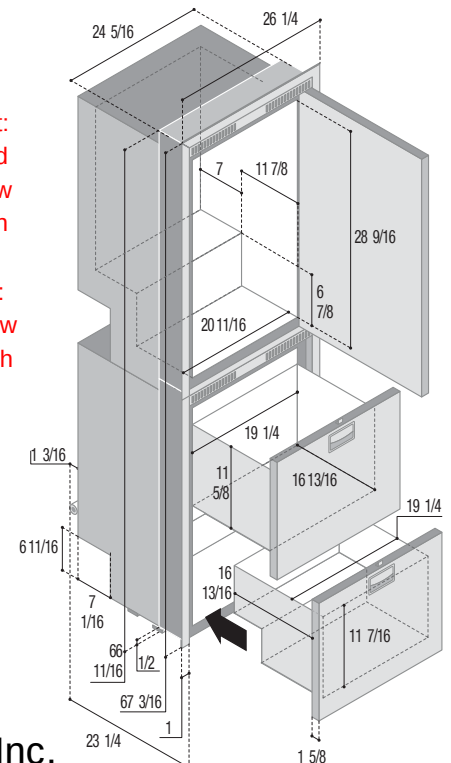

Cabinet:
23.25" d
24.30" w
66.68" h

Flange:
26.25" w
67.19" h



Available as
Disponible comme
Disponible como

1 Refrigerator
Réfrigérateur
Frigorífico

2 Freezer
Congélateur
Congelador

3 Freezer + icemaker
Congélateur + icemaker
Congelador + icemaker

Cu. Ft.

5.5	1
2.6	1

1
2

DW250
IXP4-EFV

DW250
IXN4-EFV

VITRIFRIGO



H max
11 13/16 in.

Power supply
Alimentation
Alimentación

12/24 Vdc

100-240 Vac 50/60 Hz

DW250IXP4-EFV

Power supply and nominal consumption
Alimentation et consommation nominale
Alimentación y consumo nominal

12 Vdc	115 Vac 60 Hz
A 45 W (3.78 A)	45 W (0.57 A)
B 38 W (3.18 A)	51 W (0.51 A)

Net Weight
Poids net
Peso neto

Lbs.
143.3

DW250IXN4-EFV


12 Vdc	115 Vac 60 Hz
A 45 W (3.78 A)	45 W (0.57 A)
B 40 W (3.38 A)	40 W (0.53 A)

Lbs.
143.3

Dimensions and specifications subject to change



Flush Flange



Built-in
Compartiment encastré
Alojamiento empotrado


a: 23 3/8
b: 24 5/16
c: 51 15/16

Mounting flange
Cadre de fixation
Perfil de fijación

t: 1
w: 26 1/4
h: 52 3/8



Surface Flange




a: 21 5/8
b: 24 5/16
c: 52 3/16

t: 11/16
w: 25 3/8
h: 52 1/16

Surface Flange versions

Surface flange versions
Surface flange versiones

DW250IXP4-ESV
DW250IXN4-ESV

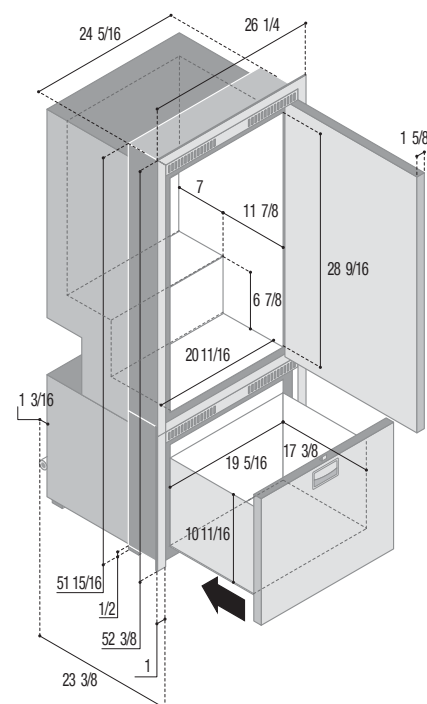

Cabinet:
23.38" d
24.31" w
51.94" h

Flange:
26.25" w
52.38" h



Coastal Climate Control, Inc.

www.CoastalClimateControl.com - info@CoastalClimateControl.com
301-352-5738 - Annapolis MD USA