

# DW51

## Power supply

Alimentation  
Alimentación

12/24 Vdc

100-240 Vac 50/60 Hz

## DW51RXP4-F

### Power supply and nominal consumption

Alimentation et consommation nominale  
Alimentación y consumo nominal

12 Vdc 115 Vac 60 Hz

40 W (3.38 A) 40 W (0.53 A)

### Net Weight


Poids net

Peso neto

Lbs.

52.9

### Flush Flange



Built-in  
Compartiment encastré  
Alojamiento empotrado

a: 20 1/4

b: 15 9/16

c: 20 7/8

Mounting flange  
Cadre de fixation  
Perfil de fijación

t: 1

w: 17 7/16

h: 21 1/16



## FREEZER COMPARTMENT

COMPARTIMENT DE CONGÉLATEUR

COMPARTIMIENTO CONGELADOR



Dimensions and specifications subject to change

## Stainless steel drawer refrigerators and freezers

### Available as

Disponible comme  
Disponible como

1 Refrigerator  
Réfrigérateur  
Frigorífico


Cu. Ft.

1.8

1

DW51RXP4-F

# VITRIFRIGO

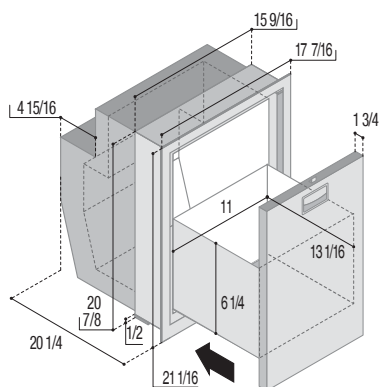

H max  
9 13/16 in.



## Coastal Climate Control, Inc.

www.CoastalClimateControl.com - info@CoastalClimateControl.com

301-352-5738 - Annapolis MD USA

Available as  
Disponible comme  
Disponible cómo

1 Refrigerator  
Réfrigérateur  
Frigorífico

Cu. Ft.  
1.5



DW42RXP4-F



Power supply  
Alimentation  
Alimentación

12/24 Vdc  
100-240 Vac 50/60 Hz

Power supply with IM  
Alimentation avec IM  
Alimentación con IM

115 Vac 60 Hz  
220-240 Vac 50 Hz


#### DW42RXP4-F

Power supply and nominal consumption  
Alimentation et consommation nominale  
Alimentación y consumo nominal

12 Vdc 115 Vac 60 Hz  
31 W (2.58 A) 31 W (0.44 A)

Net Weight  
Poids net  
Peso neto  
Lbs.  
48.5

#### Flush Flange



Built-in  
Compartiment encastré  
Alojamiento empotrado

a: 14 15/16  
b: 15 9/16  
c: 20 1/2

Mounting flange  
Cadre de fixation  
Perfil de fijación

t: 1  
w: 17 7/16  
h: 21 1/16

Dimensions and specifications subject to change



H max  
16 9/16 in.

# VITRIFRIGO

Available as  
Disponible comme  
Disponible cómo

1 Refrigerator  
Réfrigérateur  
Frigorífico

Cu. Ft.  
1.2



DW35RXP4-EF



Power supply  
Alimentation  
Alimentación

12/24 Vdc  
100-240 Vac 50/60 Hz

Power supply with IM  
Alimentation avec IM  
Alimentación con IM

115 Vac 60 Hz  
220-240 Vac 50 Hz


#### DW35RXP4-EF

Power supply and nominal consumption  
Alimentation et consommation nominale  
Alimentación y consumo nominal

12 Vdc 115 Vac 60 Hz  
40 W (3.38 A) 40 W (0.53 A)

Net Weight  
Poids net  
Peso neto  
Lbs.  
52.9

#### Flush Flange



Built-in  
Compartiment encastré  
Alojamiento empotrado

a: 28 5/8  
b: 19 5/8  
c: 11 1/4


Mounting flange  
Cadre de fixation  
Perfil de fijación

t: 1  
w: 19 5/8  
h: 11 3/4

Dimensions and specifications subject to change



H max  
6 1/8 in.

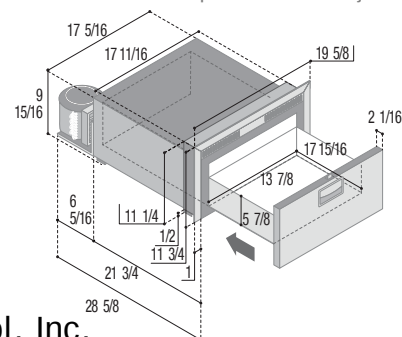

Coastal Climate Control, Inc.  
www.CoastalClimateControl.com - info@CoastalClimateControl.com  
301-352-5738 - Annapolis MD USA